


LED High bay light 100W - 100lm/W - IP65

Industrial LED bell with a power of 100W and an efficiency of 100 lm/W. It offers high-quality light with a CRI>80 and a 100° beam angle, perfect for illuminating large spaces such as storage areas and workshops. It features IP65 protection for outdoor use and demanding environments. Available in neutral white (4000K) and cool white (6000K). Its competitive price ensures an excellent return on investment.



Product data

| | |
|-------------------------|--|
| Light temperature (use) | 4000°K (use), 6000K (use) |
| Opening angle (°) | 100 |
| Energy efficiency class | E |
| CRI | 80-85 |
| Dimensions (mm) LxWxH | Ø274 x 66 |
| Dimmable | No |
| Efficiency (Lm/w) | 100 |
| Power factor (cosφ) | 0.9 |
| IK | 08 |
| IP | IP65 |
| Kelvin (K) | 4000, 6000 |
| Lumens (Lm) | 10160 (BN) / 10120 (BF) |
| Material | Metal |
| Material diffuser | Polycarbonate |
| Assembly | Suspension |
| Orientable | No |
| Power (W) | 100 |
| Sensor | No |
| Nominal Voltage (V) | 190 - 260V AC |
| Key | Cold white, Neutral white |
| Outdoor Use | If |
| Recommended Use | Industry, Parking, Industrial Warehouses |

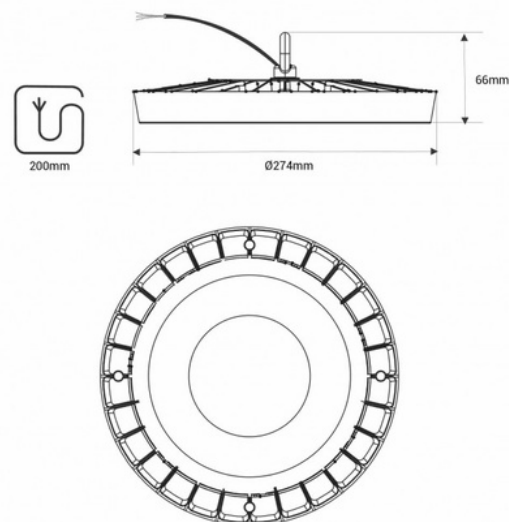

Service life (h)

25,000

Product variants

| Reference | Attributes | |
|---------------|---------------------------------------|---|
| B8140-100W-BF | Light temperature (use): 6000K (use) |  |
| B8140-100W-BN | Light temperature (use): 4000°K (use) |  |