


Recessed Backlight LED panel - 120x30cm - 36W - 135lm/W - UGR22 - Philips driver - IP40

The LED Backlight panel with Philips driver features backlight technology or backlit, which combines innovative optical and mechanical design characteristics to achieve high-efficiency, uniform lighting with minimal glare (UGR22). Available in warm white (3000K), neutral white (4000K), and cool white (6000K), it has a power of 36W and a high luminous efficiency of 135lm/W. Its high color rendering index, CRI>80, allows it to reproduce colors very similarly to natural light. ** 5 Year Warranty **



Product data

Light temperature	3000°K, 4000°K, 6000K
Opening angle (°)	120
Certs	CE, ROHS
Energy efficiency class	D
CRI	80-85
Dimensions (mm) LxWxH	1195 x 295 x 32
LED Panel Dimensions	120x30
Dimmable	No
Driver	Philips
Efficiency (Lm/w)	135
Power factor (cosφ)	0.9
Frequency (Hz)	50 - 60
Frequency of Use	Intensive
Guarantee	5 years
IP	IP40
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	4860
Assembly	Recessed
Power (W)	36
LED Technology	BACKLIT - BACKLIGHT
Nominal Voltage (V)	220 - 240 V AC
Type of LED	SMD 2835

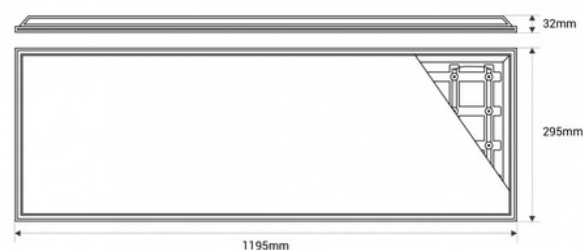

Key	Warm white, Cold white, Neutral white
UGR	UGR22
Outdoor Use	No
Recommended Use	Offices, Commerce, Parking
Service life (h)	25,000

Product variants

Reference

Attributes

B5236-BACKLIGHT-BC

Light temperature : 3000°K



B5236-BACKLIGHT-BF

Light temperature : 6000K



B5236-BACKLIGHT-BN

Light temperature : 4000°K

