

Single colour controller 12-48V DC - 15A - RF 2.4G - PUSH dimmer - Skydance



Ref. SK-V1-L/P

Monocolor controller for LED luminaires of 12-48V, high quality and durability. Allows the variation of PWM frequency between: 500Hz, 2kHz, 8kHz, or 16kHz and selection of linear or logarithmic regulation curve. Offers a smooth dimming from 0 to 100% without flickering and is compatible with 2.4G RF Skydance remote controls. It is adjustable by PUSH. It features "auto-transmission" and "auto-synchronization" functions, allowing signals to be sent to other controllers and synchronizing them when controlled by the same remote control.



Product data

| | |
|-----------------------|---|
| Certs | CE, ROHS |
| Connectivity | RF |
| Dimensions (mm) LxWxH | 175 X 45 X 27 |
| Control distance | 30 minutes |
| Guarantee | 5 years |
| Maximum intensity (A) | 15A (12-24V) / 10A (36-48V) |
| IP | IP20 |
| Power (W) | 12V:180W / 24V:360W / 36V:360W / 48V:480W |
| Temperature range | -30°F ~ +55°F |
| Control system | PUSH |
| Output Voltage (V) | 12 - 24 |
| Nominal Voltage (V) | 12-48V |
| Outdoor Use | No |

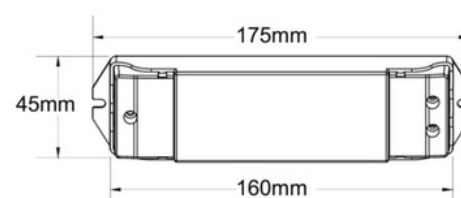

Product variants

Reference

Attributes



SK-V1-L/P