


## Single colour controller 12-48V DC - 8A - RF 2.4G - PUSH dimmer - MINI - Skydance

### Ref. SK-V1-H


Monocolor controller for 12-48V LED luminaires, of high quality and durability. Offers a smooth dimming from 0 to 100% without flickering and is compatible with 2.4G RF Skydance remote controls. It is adjustable by PUSH. It features "auto-transmission" and "auto-synchronization" functions, allowing signals to be sent to other controllers and synchronizing them when they are controlled by the same remote. Mini size, easy to install in a standard 86x86mm wall box.

### Mechanical Structures and Installations



### Product data

Certs	CE, ROHS
Connectivity	RF
Dimensions (mm) LxWxH	52 x 52 x 26
Control distance	30 minutes
Guarantee	5 years
IP	IP20
Material	Polycarbonate
Temperature range	-30°F ~ +55°F
Control system	PUSH
Output Voltage (V)	12-48VDC
Nominal Voltage (V)	12-48VDC
Outdoor Use	No

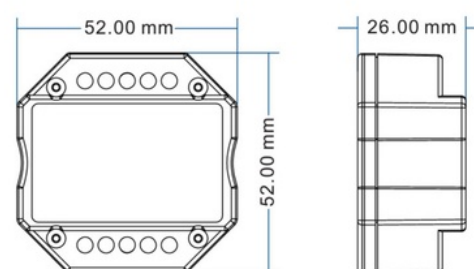

Product variants

Reference

Attributes

SK-V1-H

