




| Safety and EMC       |   |
|----------------------|---|
| EMC standard (EMC)   | ETSI EN 301 489-1 V2.2.3<br>ETSI EN 301 489-17 V3.2.4 |
| Safety standard      | EN 62368-1:2020+A11:2020                              |
| Radio Equipment(RED) | ETSI EN 300 328 V2.2.2                                |
| Certification        | CE,EMC,RED  |



## RGB+CCT Controller 12-48V DC - 25A (5A/channel) - RF 2.4G - PUSH dimmer - Skydance

### Ref. SK-V5


RGB + CCT Controller with 3 channels for LED luminaires of 12-48V. It features 10 preset dynamic modes. Offers a smooth dimming from 0 to 100% without flicker and is compatible with 2.4G RF Skydance remote controls. It is adjustable by PUSH. It has a "auto-transmission" and "auto-synchronization" function, allowing signals to be sent to other controllers and synchronizing them when controlled by the same remote.

### Mechanical Structures and Installations



### Product data

|                       |  |
|-----------------------|--|
| Certs                 | CE, ROHS   |
| Connectivity          | RF   |
| Color control         | RGB+CCT  |
| Dimensions (mm) LxWxH | 175 X 45 X 27                                      |
| Control distance      | 30 minutes   |
| Guarantee             | 5 years  |
| Maximum intensity (A) | 5A/CH: 12-24V 4A/CH: 36-48V                        |
| IP                    | IP20   |
| Number of channels    | 5  |
| Power (W)             | 5 x 60: 12V 5 x 120: 24V 5 x 144: 36V 5 x 192: 48V |
| Nominal Voltage (V)   | 12-48VDC   |
| Outdoor Use           | No   |

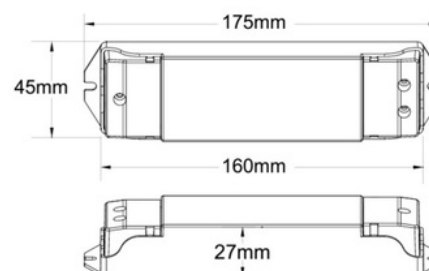

Product variants

Reference

Attributes



SK-V5