


Asymmetrical outdoor LED floodlight - 300W - 140lm/W- IP66


Ref. B8222

Asymmetrical LED projector 300W, compact and sturdy, with high efficiency (140lm/W). Perfect for sports, industrial, and outdoor spaces thanks to its asymmetrical lens that optimizes light distribution. Projection distance: 8-12m. Mounting height: 6-20 meters Degree of protection IP66. 7-year warranty

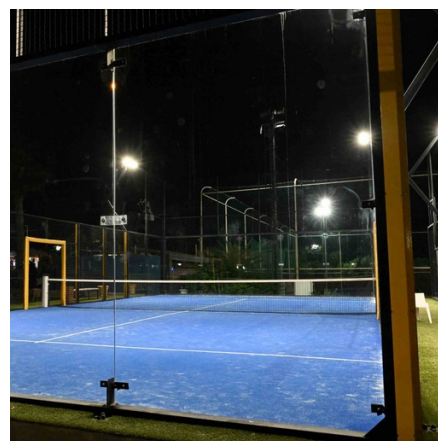

Product data

| | |
|-------------------------|---|
| Opening angle (°) | 80 / 150 |
| Certs | CE, ROHS |
| Energy efficiency class | D |
| Dimensions (mm) LxWxH | 400 X 305 X 45 |
| Dimmable | No |
| Efficiency (Lm/w) | 140 |
| Frequency (Hz) | 50 - 60 |
| Projector Range | Asymmetrical |
| Guarantee | 7 years |
| IP | IP66 |
| Kelvin (K) | 5000 |
| Material | Metal |
| Material diffuser | Polycarbonate |
| Orientable | Yes |
| Net Weight (kg) | 4.46 |
| Power (W) | 300 |
| Nominal Voltage (V) | 85-265V AC |
| Type of LED | Chip EPISTAR |
| Key | Cold white |
| Outdoor Use | If |
| Recommended Use | Industry, Parking, Industrial Warehouses, Sports Fields |
| Service life (h) | 50000 |

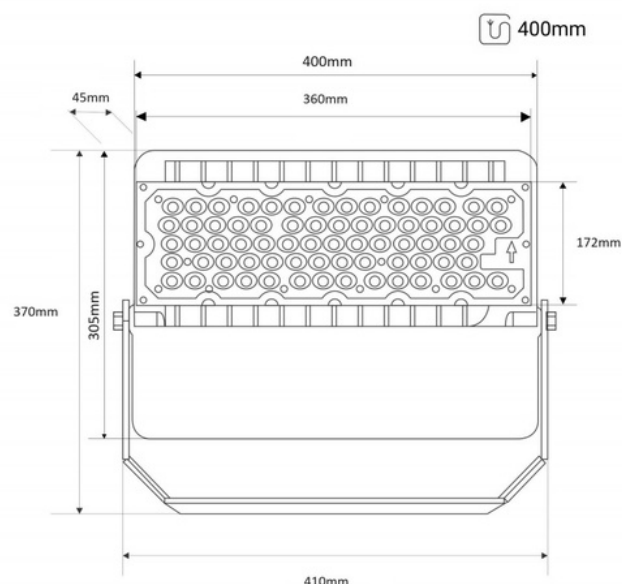

Product variants

Reference

Attributes

B8222

