




Adjustable round LED downlight - 38W - CCT - Black - 120° LIFUD Driver

Recessed circular LED downlight, adjustable, made of high-quality aluminum, with a white finish. Especially recommended for commercial use, with 38W of power and CCT system, which allows you to select the color temperature between warm white (3000K), neutral white (4000K), and cool white (5700K). Wide opening angle of 120° and orientation of up to 50°. Efficient and durable. ** 5-Year Warranty **



Product data

Housing color	White (use), Black (use)
High	135mm
Width	Ø195mm
Opening angle (°)	50, 90 degrees
Certs	CE, ROHS
Energy efficiency class	E
CRI	80-85
Cutting dimensions (mm)	Ø165mm
Dimmable	No
Power factor (cosφ)	0.95
Form	Circular
Frequency (Hz)	50 - 60
Frequency of Use	Intensive
Guarantee	5 years
IP	IP20
Kelvin (K)	3000, 4000, 5700
Lumens (Lm)	3600
Material	Aluminum
Material diffuser	Crystal
Assembly	Recessed
Orientable	Yes, 50°
Power (W)	38

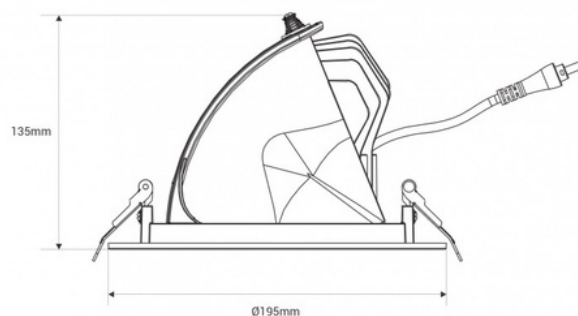

Temperature range	-20°F ~ +40°F
Nominal Voltage (V)	220 - 240 V AC
Type of LED	SMD 2835
Key	CCT
Outdoor Use	No
Service life (h)	<n_generated_text>35000</n_generated_text>
Driver	External, Lifud
Sensor	No
Recommended Use	Hotels, Commerce, Museums - Galleries, Fashion and retail

Product variants

Reference	Attributes	
B1262-38CCT	Housing color: White (use)	
B1262-38CCT-N	Housing color: Black (use)	