


## Rectangular adjustable CCT LED Downlight - 60W - White - 100° LIFUD Driver

Recessed LED rectangular downlight, adjustable, made of high-quality aluminum, with a white finish. Especially recommended for commercial use, with 60W of power and CCT system, which allows selecting the color temperature between warm white (3000K), neutral white (4000K), and cool white (5700K). Epistar LED chip and Lifud driver. Flicker-free lighting. Wide opening angle of 100° and orientation of up to 60°. Efficient and durable.




### Product data

Housing color	White (use), Black (use)
High	96mm
Width	145mm
Opening angle (°)	100
Certs	CE, ROHS
Energy efficiency class	E
CRI	80-85
Cutting dimensions (mm)	227mm x 130mm
Dimmable	No
Driver	External, Lifud
Efficiency (Lm/w)	120
Form	Cuadrado
Guarantee	5 years
IP	IP20
Kelvin (K)	3000, 4000, 5700
Long	240mm
Material	Aluminum
Material diffuser	Crystal
Assembly	Recessed
Orientable	Yes, 60 degrees
Power (W)	60
Sensor	No

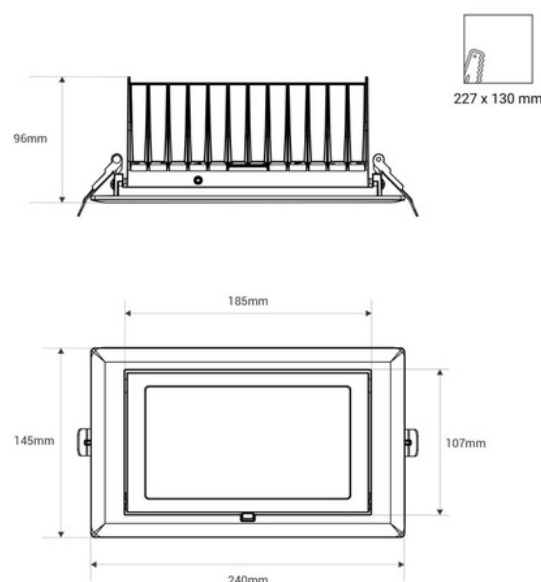

Nominal Voltage (V)	220 - 240 V AC
Type of LED	SMD 2835, Chip EPISTAR
Key	CCT
Outdoor Use	No
Recommended Use	Hotels, Commerce, Museums - Galleries, Fashion and retail

Product variants

Reference	Attributes	
B1263-60W-CCT-B	Housing color: White (use)	
B1263-60W-CCT-N	Housing color: Black (use)	