



Downlight LED IP44 mit einstellbarer Leistung 10W/15W/20W - CCT - 100lm/W - Ausschnitt Ø 150mm


Ref. B1279-150-CCT

Downlight LED IP44 de alta calidad con potencia ajustable (10W/15W/20W). Con sistema CCT para seleccionar la temperatura de color (3000K/4000K/6500K). Perfecto para terrazas, porches y zonas exteriores cubiertas.



Produktdaten

Nennspannung (V)	220 - 240 V AC
Leistung (W)	20, 15, 10
Kelvin (K)	3000, 4000, 6500
Öffnungswinkel (°)	80
IP	IP44
Tonalität	CCT
Effizienz (Lm/w)	100
Lumen (Lm)	2000
CRI	80-85
LED-Typ	SMD 2835
Leistungsfaktor (cosφ)	0,9
Schnittmaße (mm)	Ø150mm
Material	Polycarbonat
Materialdiffusor	Polycarbonat
Außengebrauch	Ja
Zertifikate	CE, ROHS
Garantie	Nach gesetzlicher Garantie: 3 Jahre
Breite	Ø173mm
Hoch	90mm
Nutzungsdauer (h)	30000
UGR	UGR22

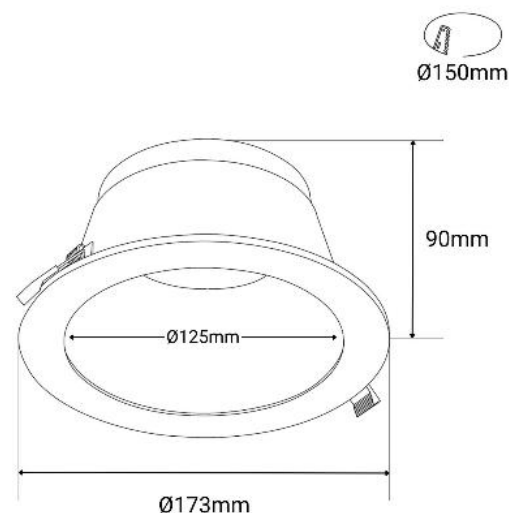

Produktvarianten

Artikelnummer

Eigenschaften



B1279-150-CCT