




Downlight LED IP44 verstelbare vermogen 10W/15W/20W - CCT - 100lm/W - Snede Ø 150mm


Ref. B1279-150-CCT

Downlight LED IP44 de alta calidad con potencia ajustable (10W/15W/20W). Con sistema CCT para seleccionar la temperatura de color (3000K/4000K/6500K). Perfecto para terrazas, porches y zonas exteriores cubiertas.

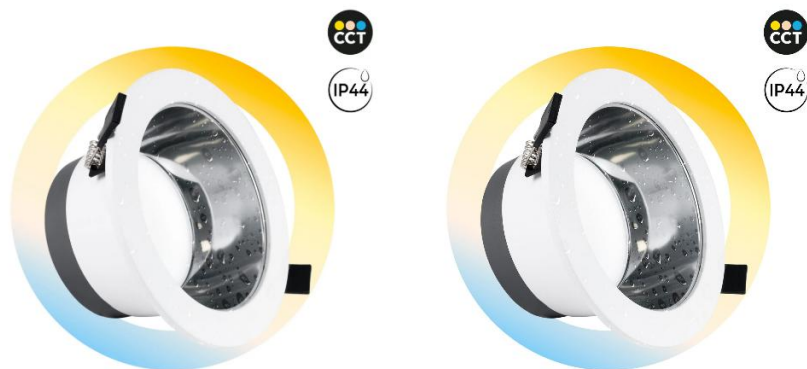

Product data

Nominale Spanning (V)	220 - 240 V AC
Vermogen (W)	20, 15, 10
Kelvin (K)	3000, 4000, 6500
Openingse_angle (°)	80
IP	IP44
Toonladder	CCT
Efficiëntie (Lm/w)	100
Lumen (Lm)	2000
CRI	80-85
Type LED	SMD 2835
Powerfactor (cosφ)	0,9
Snijafmetingen (mm)	Ø150mm
Materiaal	Polycarbonaat
Materiaal diffuser	Polycarbonaat
Buiten gebruik	Ja
Certificaten	CE, ROHS
Garantie	Volgens wettelijke garantie: 3 jaar
Breedte	Ø173mm
Hoog	90mm
Houdbaarheid (u)	30.000
UGR	UGR22

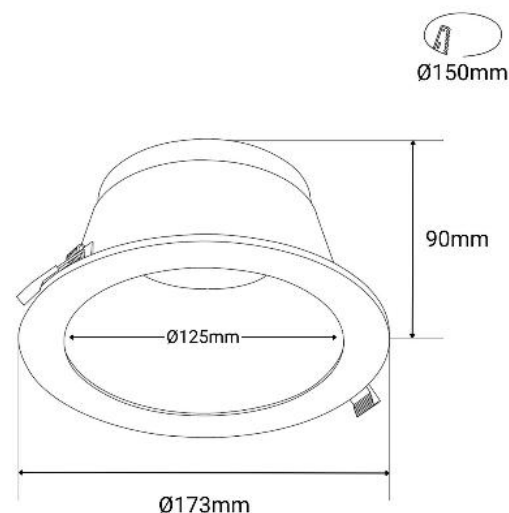

Product variants

Reference

Attributes



B1279-150-CCT