


40W



Linkable LED Tri-proof Light - DALI Dimmable - CCT - 120cm - 40W - LIFUD Driver - IP65

Ref. B8400-120-CCT-DALI

Linkable waterproof linear screen of 120 cm and 40W, of high quality, with excellent luminous performance. Includes a DALI dimmable LIFUD driver and CCT system to adjust the color temperature according to the needs of the environment. With IP65 protection rating, perfect for demanding environments.

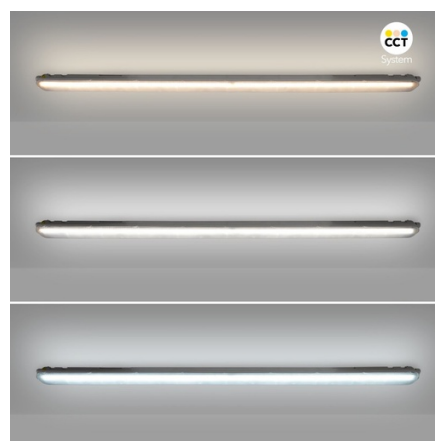


Product data

| | |
|-------------------------|--------------------------------------|
| High | 61mm |
| Width | 72 mm |
| Beam angle (°) | 120 |
| Certs | CE, ROHS |
| Energy efficiency class | E |
| CRI | 80-85 |
| Dimmable | Yes |
| Driver | Lifud |
| Frequency (Hz) | 50 - 60 |
| Warranty | According to legal warranty: 3 years |
| IP | IP65 |
| Kelvin (K) | 3000, 4000, 6500 |
| Long | 1180 mm |
| Lumens (Lm) | 5200 |
| Material | Polycarbonate |
| Material diffuser | Polycarbonate |
| Assembly | Surface |
| Orientable | No |
| Power (W) | 40 |
| Sensor | No |
| Control system | DALI |
| Nominal Voltage (V) | 220 - 240 V AC |



| | |
|------------------|--|
| Type of LED | SMD 2835 |
| Key | CCT |
| Outdoor Use | Yes |
| Recommended Use | Industry, Parking, Industrial Warehouses |
| Service life (h) | 25,000 |

| Product variants | |
|--------------------|--|
| Reference | Attributes |
| B8400-120-CCT-DALI | <div> <div> <div>40W</div>  </div> </div> |