

## LED-Treiber dimmbar RF Push CC 50W 250-1500mA - Perfect RF - Sunricher


### Ref. SRP-1009-50CC

Der SRP-1009-50CC ist ein 50W dimmbares LED-Netzteil mit einem konstanten Stromausgang von 1 Kanal und einstellbarem Strom von 250mA bis 1500mA über DIP-Schalter für die verschiedenen konstanten Ströme. Es ist für einen Eingang von 200 - 240V ausgelegt. Der Leistungsfaktor des Treibers kann größer als 0,9 sein, und die Effizienz übersteigt 87%. Es ermöglicht ein sanftes und tiefes Dimmen von 0,1% ohne Flimmern oder Summen. Der LED-Treiber ist mit einer RF-Steuerungsschnittstelle ausgestattet und kann mit einer Vielzahl von RF-Fernbedienungen kompatibel sein. Dieser Treiber stammt von der Marke Sunricher in der Kategorie Perfect RF.

Selectable Current	250mA	300mA	350mA	400mA	450mA	500mA	600mA	700mA
DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V
Selectable Current	800mA	900mA	1000mA	1100mA	1200mA	1300mA	1400mA	1500mA
DC Voltage Range	8-48V	8-48V	8-48V	8-4V	8-4V	8-38V	8-35V	8-33V
Rated Power	50W							
Voltage Range	200-240V AC							
Frequency	50/60Hz							
Power Factor (Typ.)	> 0.9							
Efficiency (Typ.)	87% @ 230VAC							
Input Current (Typ.)	0.27A @ 230VAC							
Inrush Current (Typ.)	COLD START Max. 2A at 230VAC							
Short Circuit	Yes, auto recovery after fault removed							
Over Voltage	Yes, auto recovery after fault removed							
Over Temperature	Yes, auto recovery after fault removed							
Working Temp.	-20°C ~ +45°C							
Max. Case Temp.	85°C							
Working Humidity	10% ~ 95% RH non-condensing							
Storage Temp. & Humidity	-40°C ~ +85°C, 10% ~ 95% RH							

### Produktdaten

Zertifikate	CE, ROHS
Garantie	5 Jahre

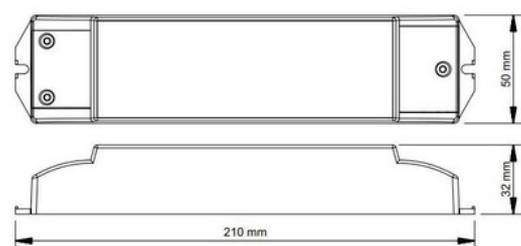

## Produktvarianten

Artikelnummer

Eigenschaften



SRP-1009-50CC