

AiDimming Zhongshan AiDimming Electronics Co., Ltd. Non-Dimming LED Driver/Constant Current

PE292B 20-30W
PE291B 30-60W

Features:

- LED universal dimming driver, dimming range 0-100%
- Suitable for RFC, MOSFET dimmer and PFC TRIAC dimmer
- Active PFC
- Protection against circuit/over voltage/over current
- Natural cold wind
- Big terminal locked by screw
- Suitable for LED home lighting and commercial lighting
- Safe no load protection device
- Economic and convenient installation
- conform to the world lighting equipment safety standards
- Protection class II
- Three years warranty

RoHS SELV CE Class 2

General description:

PE292B-PE291B is one of the constant current dimming LED driver developed by my company with high power factor, high efficiency, high precision, the use of the efficient stable low loss switch control chip and the high performance components makes it with low noise, long life and other characteristics.


Driver LED dimmable TRIAC 43-60V-DC 500ma 30W

Ref. PE292B6050

Driver Dimmable Triac 43-60V/DC, courant constant, 500 ma, 30W. Régulation PFC intelligente, plage de régulation 2/100%. Driver dimmable Triac à courant constant spécialement conçu pour le dimming TRIAC des luminaires LED. Certifié TUV. AUCUNE scintillation, sans scintillement. Les protections incluent SCP/OCP/OVP/OTP. Puissance 30 Watts. Garantie de 2 ans.

Caractéristiques du produit

Certificats	CE, ROHS
Classe d'efficacité énergétique	A+ (2021)
Connectivité	Par câblage
Dimensions (mm) LxIxh	156,5x44x29
Fréquence (Hz)	50 - 60
Fréquence d'utilisation	Intensif
Garantie	Selon la garantie légale : 3 ans
Matériau	Plastique
Puissance (W)	30
Capteur	Non
Système de contrôle	TRIAC
Tension de sortie (V)	43-60V-CC
Tension Nominale (V)	180-240V-AC
Usage extérieur	Non
Durée de vie (h)	25000

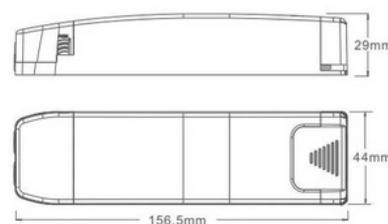

Variantes du produit

Référence

Attributs

PE292B6050

