


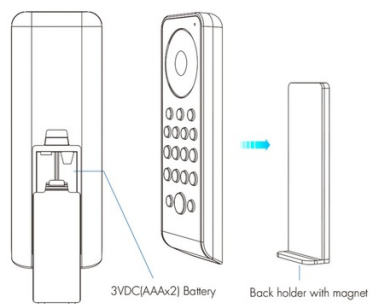

Each zone can switch single color, dual color(WW/CW), RGB, RGBW, or RGB+CCT(WW/CW) RF LED controller.

- Single color
- Dual color(WW/CW)
- RGB
- RGBW
- RGB+CCT


For example, long press **1** key for 2s will set zone 1 to RGB light type.
When remote type change, the green indicator goes on a long time.
Long press **1** key + any of the five key for 2s will set all 8 zones to the same light type correspondingly.

Touch to change current zone brightness, color temperature or RGB color.
Press BFT, CCT or RGB key to switch between brightness wheel, color temp wheel or RGB color wheel.

Jednokolorowy pilot LED / CCT / RGB / RGBW / RGB + CCT - 8 stref / 8 scen - SK-RS10 - Skydance


Ref. SK-RS10-N

Bezprzewodowy pilot Skydance, monochromatyczny, CCT, RGB, RGBW, RGB + CCT z 8 strefami umożliwia regulację koloru i intensywności światła za pomocą koła dotykowego oraz niezależnych przycisków. Szybkie i niezawodne przesyłanie RF na odległość do 30 metrów. Zawiera uchwyt do montażu na ścianie.



Product data

Wysoki	17,5 mm
Szerokość	50mm
Certyfikaty	CE, ROHS
Łączność	RF
Kontrola koloru	RGB, RGBW, RGB+CCT
Odległość kontrolna	30m
Gwarancja	5 lat
Długi	141 mm
Materiał	Poliwęglan
Zakres temperatur	-30°C ~ +55°C
Rodzaj baterii	3V (AAA * 2SZT)

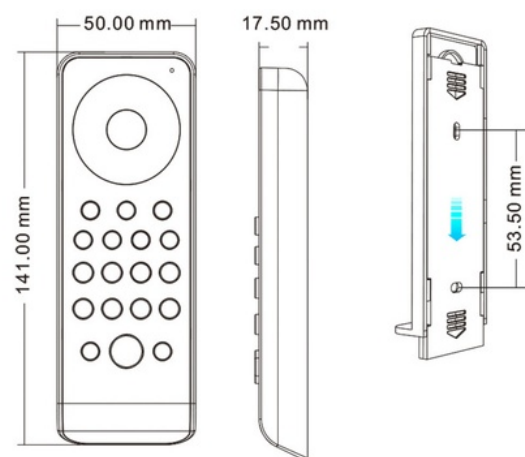

Product variants

Reference

Attributes

SK-RS10-N

