


Pack of 8 slim LED panels 120X30 cm - Driver Philips - 44W - UGR19

PACK x 8 LED recessed panels 120x30cm - PHILIPS driver. The panels feature a sleek, ultra-slim design and cutting-edge technology that allow them to provide powerful, uniform lighting in 3 color temperatures: warm white (3000K), neutral white (4000K), and cool white (6000K). They incorporate a micro-prismatic diffuser that ensures glare-free lighting (UGR<19), ideal for offices, conference rooms, schools, or hospitals. Thanks to their high color rendering index (CRI>80), they reproduce colors very similarly to natural light. The panels can be mounted on false ceilings (removable ceiling tiles of 120x30cm) or embedded directly into drywall using an inset frame (not included).

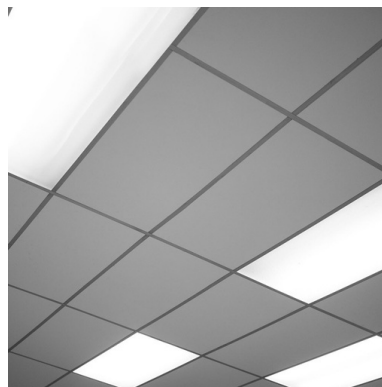

Product data

Light temperature	Cold White (DO NOT USE) , Warm White (DO NOT USE) , Neutral White (DO NOT USE)
Certs	CE, ROHS
CRI	80-85
Dimensions (mm) LxWxH	1200x300x6mm
LED Panel Dimensions	120x30
Dimmable	Optional, replacing the driver
Driver	Philips
Frequency (Hz)	50 - 60
Frequency of Use	Intensive
Guarantee	3 years
IP	IP20
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	2900
Material diffuser	Polycarbonate
Assembly	Recessed
Power (W)	44
Sensor	No
Nominal Voltage (V)	220 - 240 V AC
Type of LED	SMD 2835
Key	Warm white, Cold white, Neutral white
UGR	UGR19
Outdoor Use	No
Service life (h)	25,000



Product variants

Reference	Attributes	
K5236-BC-8	Light temperature : Warm White (DO NOT USE)	
K5236-BF-8	Light temperature : Cold White (DO NOT USE)	
K5236-BN-8	Light temperature : Neutral White (DO NOT USE)	