


DMX512 decoder 12-24V DC - 15A - 1 kanaal

Ref. SK-D1-L

De DMX512 Decodering is een LED-verlichtingscontroller met 1 uitgangskanaal met een maximale intensiteit van 15A. Het is compatibel met ingangsspanningen van 12-24V. Gebruik het DMX512-ingangssignaal en biedt een PWM-uitgangssignaal om een soepele verlichtingselementenregeling te bereiken. Ondersteunt RDM-remote control, maakt het kiezen van de uitvoerresolutie en PMW-frequentie-aanpassing mogelijk.



Wiring Diagram

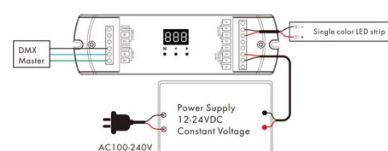

Note:
1. An DMX signal amplifier is needed if more than 32 decoders are connected, or use overlong signal line, signal amplification should not be more than 5 times continuously.
2. If the recoil effect occurs because of longer signal line or bad line quality, please try to connect 0.25W 90-120Ω terminal resistor at the end of each DMX signal line

Product data

Certificaten	CE, ROHS
Connectiviteit	DMX
Afmetingen (mm) LxIxH	170 x 50 x 23
Garantie	5 jaar
Maximale intensiteit (A)	15
IP	IP20
Aantal kanalen	1
Uitgangsspanning (V)	12 - 24 V
Nominale Spanning (V)	12-24V DC
Buiten gebruik	Nee

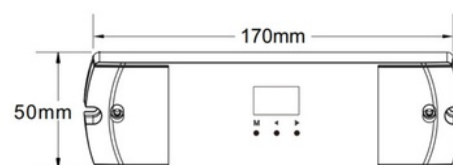

Product variants

Reference	Attributes
SK-D1-L	